

3245 7A

Charger for Lead Acid batteries



tech spec


- 5-step charge control with microprocessor
- For all types of Lead Acid batteries: GEL, AGM, WET, SLA
- Mode select for battery size, type, recondition and as power supply
- Protected against reversed polarity and short circuit proof
- Memory function for last used charge program
- Temperature compensated charge voltage w. external temp. sensor
- Practical briefcase for storage
- LED flashlight included



Technical data 12V

Input voltage: / Line frequency:	198 - 264VAC / 47 - 63Hz
Max output power:	103W
Modes	1. Large batteries 2. Small batteries 3. Gel batteries 4. Recond 5. Power supply
Charge voltage:	14.7V at 20°C
Charge voltage GEL:	14.4V at 20°C
Charge voltage Recond:	Max 15.7V
Float voltage:	13.7V at 20°C
Charge current:	7A (1.5A small batteries and Recond Phase)
As Power supply:	Output voltage: 13.7V max 6.5A
Ripple:	< 100mVp-p
Formation Charge:	Low current start-up of deeply discharged battery.
Float charge:	7.0A pulses at safe float voltage level for maximum topping of battery capacity (1.5A pulses, small batteries).
Temperature compensation of charge voltage:	-3 to -4mV/°C pr. cell
Efficiency (at 100% load, 230V):	> 89 %
Switch frequency approx.:	65kHz
Leakage current from battery with mains switched off:	< 50 uA at 12V
Protection:	Protected against reversed polarity and short circuit proof. Prevents sparking. Charge timer: 4h. Safety timer : 72h Thermal protection. Charging of wrong lower voltage battery pack (e.g. 6V) will be limited to 1.6A (0.25A small battery) and terminated after 30 min. Charging battery > 16.2V terminated immediately.
Temperature range:	Operating: ±25 to +40°C / Storage: ±25 to +65°C
Safety:	EN 60335-2-29
Insulation class :	Class II
Insulation voltage:	Primary – secondary: 3750VAC / 5300VDC
EMC standards:	EN 55014-1 and -2
Input terminal:	Non detachable mains cable
Output terminals:	Cord with Insulated battery clips and temp. sensor
IP-Grade:	44
Dimensions:	169 x 95 x 47 mm
Weight:	900g

Charging characteristics

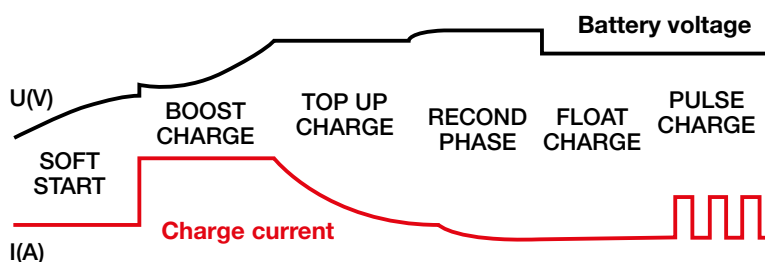

www.mascot.com

sales@mascot.no

TS180315

Main Office NORWAY
Box 177
N-1601 Fredrikstad
+ 47 69 36 43 00

Mascot UK
Bok 2090, Salisbury
Wiltshire SP2 2BH
+44 172 250 4853

Mascot DE, BENELUX
Hirschbergstr. 28/7
D-74838 Limbach
+49 628 795 140

Mascot DE, CH, AT
Tettnanger Str. 52
D-88239 Wangen
+49 752 895 1677

Mascot FRANCE
38 rue Leo Lagrange
F-94270 Le Kremlin Bicêtre
+33 146 587 185

Mascot BALTIC, RUSSIA
Taevakivi 15
13619 Tallinn, Estonia
+372 555 21 121

Mascot SWEDEN
Box 177
N-1601 Fredrikstad
+46 526 14025